



ARRAY
WOODEN FLOORING



AC4
8.3mm



Wax Coated

ARRAY

WOODEN FLOORING



ST 011

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean




Environment
Friendly



With Wax Coating



Without Wax Coating

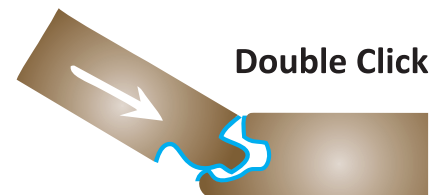

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

ARRAY

WOODEN FLOORING



ST 021A

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean





Environment Friendly



With Wax Coating



Without Wax Coating

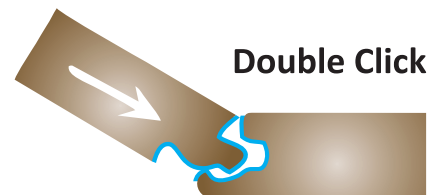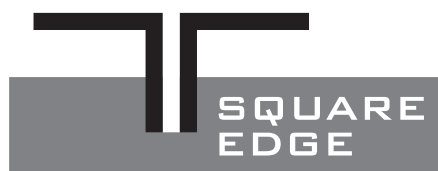

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

ARRAY

WOODEN FLOORING



ST 041

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean



Environment
Friendly




With Wax Coating



Without Wax Coating



SQUARE
EDGE

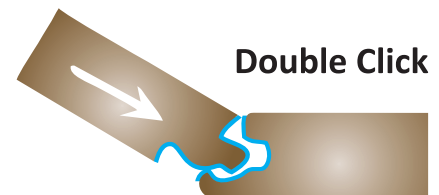

Double Click

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

ARRAY

WOODEN FLOORING



ST 071

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean




Environment Friendly



With Wax Coating



Without Wax Coating

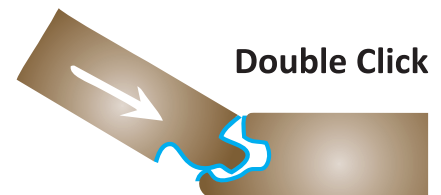

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

ARRAY

WOODEN FLOORING



ST 081

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean





Environment Friendly



With Wax Coating



Without Wax Coating

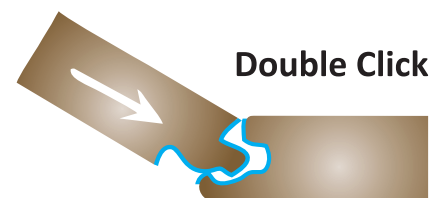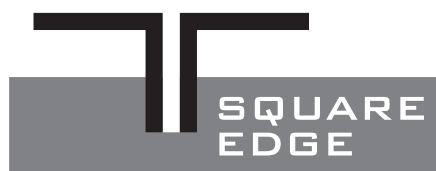

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

ARRAY

WOODEN FLOORING



ST 091

HDF | AC4
8.3mm



Wax Coated



Water Resistant



Easy to Clean




Environment
Friendly



With Wax Coating



Without Wax Coating

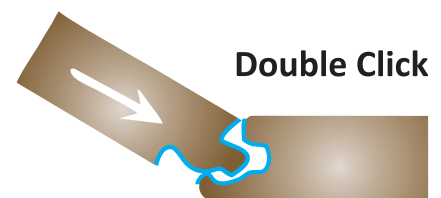

Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.

Test Property	Standard Requirements	Test Method	Result	
Squareness of the elements, Q	$Q \max \leq 0.20\text{mm}$	EN 13329 Annex A	Q max = 0.12mm	
Straightness of the surface layer, S	$S \max \leq 0.30\text{mm/m}$	EN 13329 Annex A	S max = 0.16mm/m	
Flatness of the elements, F	Maximum single values : Fw concave $\leq 0.15\%$, Fw convex $\leq 0.20\%$, Fl concave $\leq 0.50\%$, Fl convex $\leq 1.00\%$	EN 13329 Annex A	Fw concave = 0.10%	Fl concave = 0.20%
Openings between elements, O	O average $\leq 0.15\text{mm}$, O max $\leq 0.20\text{mm}$	EN 13329 Annex B	O average = 0.05mm	O max = 0.15mm
Height difference between elements, H	H average $\leq 0.10\text{mm}$, H max $\leq 0.15\text{mm}$	EN 13329 Annex B	H average = 0.05mm	H max = 0.10mm
Dimensional variations after changes in relative humidity δL , δW	δL average $\leq 0.9\text{mm}$, δW average $\leq 0.9\text{mm}$	EN 13329 Annex C	δL average = 0.5mm	δW average = 0.7mm
Thickness swelling	$\leq 18.0\%$	EN 13329 Annex G	12.00%	
Light fastness	Blue wool scale \geq Level 6	EN ISO 105-B02	Level 6	
Surface soundness	$\geq 1.00\text{N} / \text{mm}^2$	EN 13329 Annex D	$>1.00\text{N}/\text{mm}^2$	
Abrasion resistance	AC4, Class 32	EN 13329 Annex E	Average IP-value : 4000, Abrasion class AC4, Class 32	
Impact resistance	IC 1	EN 13329 Annex F	Large diameter ball 1600mm, small diameter ball : 8N. Classification : IC1	
Resistance to staining	5 (groups 1 and 2), 4 (group 3)	EN 438	4 (group 3)	
Effect of furniture leg	No damage shall be visible, when tested with foot type 0	EN 424	No visible change	
Effect of castor chair	No damage or visible change in appearance	EN 425	No visible change	
Static indentation	No visible damage	EN 433	No visible change	
Fire Resistance	Flame retardant B1	DIN 4102	Flame retardant B1	
Resistance to Cigarette burns	\geq Degree 4	EN 438	Degree 5 (No visible change)	
Formaldehyde Release	$E1 \leq 1.5$	EN 717-1	1.0mg/L	


Flooring Accessories



Skirting



Reducer

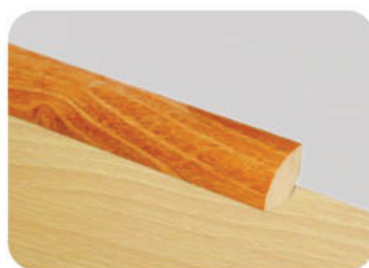

Quarter



T-profile

Floor Maintenance



Vacuum Clean



Dry Mop



Let Dry




Good Quality Floor Care Products

ARRAY

WOODEN FLOORING

Structure

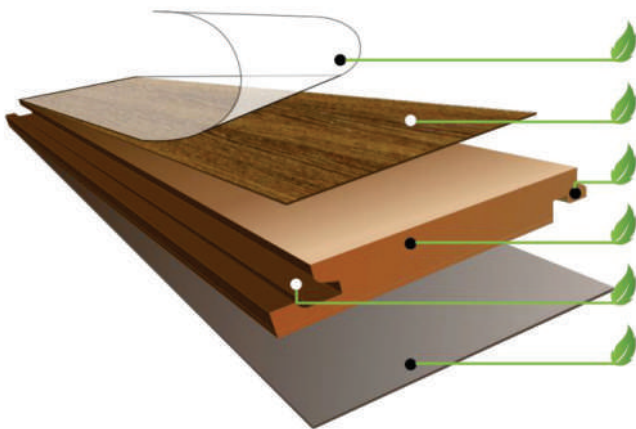

- Wear Layer**
Transparent layer is pressure, stain, scratch and wear resistant
- Decor Paper**
Innovative and high definition decor paper with beautiful wooden looks
- Easy Installation System**
Quality design, simple installation, durable locking
- HDF Core**
High Density Fiberboard made of natural wood
- Wax Coating**
Perfect edge protection against moisture
- Balance Paper**
Stabilizing layer with high dimensional stability



Wax Coated




Easy to Clean



Water Resistant



Environment Friendly



Dimensions	1218 x 199 x 8.3mm
Package	10 Planks/Box, 26.09sq. ft.



With Wax Coating



Without Wax Coating

Classification

